


Line input Sales Helper (P/N : VT710L-SW)

Operating Instruction

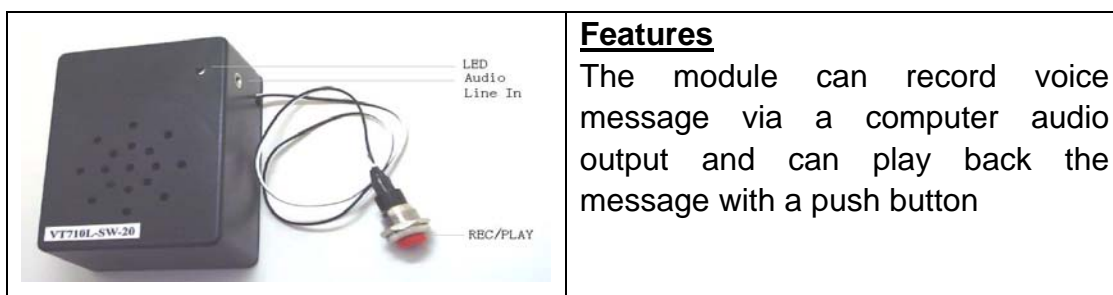

Preparation

1. Open the sound module battery door and put in 3 AA size 1.5V batteries.
2. You can make your own sound file in any computer with an audio playback capability through a 3.5mm stereo speaker jack. A good sound file with clear sound and appropriate sound volume is the most important factor controlling the quality result of the sound module. If you are not familiar with making a sound file, please take a look at http://www.microsoft.com/resources/documentation/windows/xp/all/prodds/en-us/app_soundrecorder.mspx? .Or a good sound recording and editing software can be found at <http://www.goldwave.com>

Recording procedure

1. Adjust sound playback volume of your computer to about mid level
2. Turn on the power switch
3. Connect your computer's **AUDIO OUT** to sound module's **AUDIO LINE IN** with our supplied audio cable. (**AUDIO OUT** is the output jack connecting your computer' speaker)
4. Playback you sound file in the computer and simultaneously press the **REC/PLAY** button of the sound module. The **LED** in the sound module will light up which indicates that recording is in progress. Recording will be finished after memory is full or when you release the **REC/PLAY** button. The **LED** will be off after finishing recording.

Playback procedure

1. Pull out the audio cable line from the sound module. Be careful not to press **REC/PLAY** button again before you pull out the audio cable. Otherwise the sound you have just recorded into the module will be deleted.
2. Press **REC/PLAY** button to start playback.

Note

1. After recording, check the sound. If you find the sound recorded is too noisy, you may turn the sound playback volume of your computer to a lower level.
2. The above playback & recording procedures may need to repeat for a few times to make the best sound module with the correct loudness. You need to adjust the sound file volume or the computer playback volume, etc.

Capabilites of VT710L-SW

Power : 3 pcs AA size 1.5V battery

Sound duration : 20 second

Size : 82×60×38mm

Part #	VT710L-CS-10	VT710L-CS-20	VT710L-CS-40
Voice duration	10 second	20 second	40 second
Battery Lifetime (3 pcs alkaline battery)	8,000 playback	4000 playback	2,000 playback